
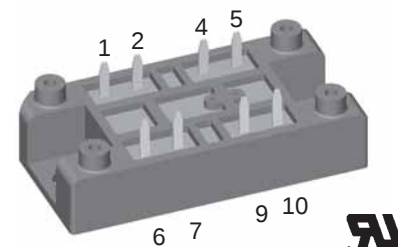


Three Phase Rectifier Bridge with Brake Chopper

$$V_{RRM} = 1200/1600 \text{ V}$$

$$I_{dAVM} = 110 \text{ A}$$

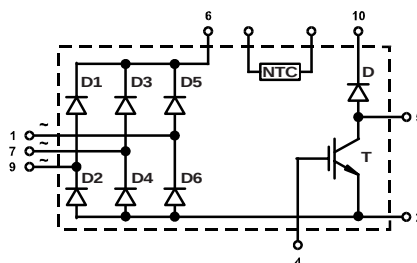

Input Rectifier D1 - D6

Symbol	Conditions	Maximum Ratings	
V_{RRM}	VUB 72 -12 NO1	1200	V
	VUB 72 -16 NO1	1600	V
I_{FAV}	$T_C = 80^\circ\text{C}$; sine 180°	40	A
I_{dAVM}	$T_C = 80^\circ\text{C}$; rectangular; $d = 1/3$; bridge	110	A
I_{FSM}	$T_{VJ} = 25^\circ\text{C}$; $t = 10 \text{ ms}$; sine 50 Hz	530	A
P_{tot}	$T_C = 25^\circ\text{C}$	100	W

Symbol	Conditions	Characteristic Values ($T_{VJ} = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
V_F	$I_F = 25 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		1.0	1.1 V
			0.9	V
I_R	$V_R = V_{RRM}$; $T_{VJ} = 25^\circ\text{C}$ $V_R = 0.8 \cdot V_{RRM}$; $T_{VJ} = 125^\circ\text{C}$		0.4	0.02 mA
				mA
R_{thJC}	per diode			1.2 K/W
R_{thJH}	with heat transfer paste			1.42 K/W

Chopper Diode D

Symbol	Conditions	Maximum Ratings	
V_{RRM}	$T_{VJ} = 25^\circ\text{C}$ to 150°C	1200	V
I_{F25}	DC; $T_C = 25^\circ\text{C}$	25	A
I_{F80}	DC; $T_C = 80^\circ\text{C}$	15	A

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
V_F	$I_F = 25 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		2.7	3.1 V
			2.0	V
I_R	$V_R = V_{RRM}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		0.1	0.1 mA
				mA
I_{RM}	$I_F = 15 \text{ A}$; $di_F/dt = -400 \text{ A}/\mu\text{s}$; $T_{VJ} = 125^\circ\text{C}$ $V_R = 600 \text{ V}$		16	A
t_{rr}			130	ns
R_{thJC}	with heat transfer paste			2.3 K/W
R_{thJH}				3.12 K/W

IXYS reserves the right to change limits, test conditions and dimensions.

Features

- three phase mains rectifier
- brake chopper:
 - IGBT with low saturation voltage
 - HiPerFRED™ free wheeling diode
- module package:
 - high level of integration
 - solder terminals for PCB mounting
 - UL registered E72873
 - isolated DCB ceramic base plate
 - large creepage and strike distances
 - high reliability

Applications

- drives with
- mains input
 - DC link
 - inverter or chopper feeding the machine
 - motor and generator/brake operation

Chopper Transistor T

Symbol	Conditions	Maximum Ratings	
V_{CES}	$T_{VJ} = 25^{\circ}\text{C}$ to 150°C	1200	V
V_{GES}		± 20	V
I_{C25}	DC; $T_C = 25^{\circ}\text{C}$	50	A
I_{C80}	DC; $T_C = 80^{\circ}\text{C}$	35	A
I_{CM}	$V_{GE} = \pm 15\text{ V}$; $R_G = 39\ \Omega$; $T_{VJ} = 125^{\circ}\text{C}$	50	A
V_{CEK}	RBSOA; $L = 100\ \mu\text{H}$	V_{CES}	
t_{SC} (SCSOA)	$V_{GE} = \pm 15\text{ V}$; $V_{CE} = 900\text{ V}$; $T_{VJ} = 125^{\circ}\text{C}$ $R_G = 39\ \Omega$; non repetitive	10	μs

Symbol	Conditions ($T_{VJ} = 25^{\circ}\text{C}$, unless otherwise specified)	Characteristic Values		
		min.	typ.	max.
$V_{CE(sat)}$	$I_C = 25\text{ A}$; $V_{GE} = 15\text{ V}$; $T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$		1.9 2.1	2.4 V
$V_{GE(th)}$	$I_C = 1\text{ mA}$; $V_{GE} = V_{CE}$	4.5		6.5 V
I_{CES}	$V_{CE} = V_{CES}$; $V_{GE} = 0\text{ V}$; $T_{VJ} = 25^{\circ}\text{C}$ $T_{VJ} = 125^{\circ}\text{C}$		0.1	0.1 mA mA
I_{GES}	$V_{CE} = 0\text{ V}$; $V_{GE} = \pm 20\text{ V}$			200 nA
$t_{d(on)}$ t_r $t_{d(off)}$ t_f E_{on} E_{off}	Inductive load, $T_{VJ} = 125^{\circ}\text{C}$ $V_{CE} = 600\text{ V}$; $I_C = 25\text{ A}$ $V_{GE} = \pm 15\text{ V}$; $R_G = 39\ \Omega$		80 50 440 50 3.8 2.0	ns ns ns ns mJ mJ
C_{ies}			2.0	nF
Q_{Gon}			150	nC
R_{thJC}				0.6 K/W
R_{thJH}				1.2 K/W
	with heat transfer paste, see mounting instructions			

Temperature Sensor NTC

Symbol	Conditions	Characteristic Values typ.	
R_{25}	$T = 25^{\circ}\text{C}$	2.2	k Ω
$B_{25/100}$	$R(T) = R_{25} \cdot e^{B_{25/100} \left(\frac{1}{T} - \frac{1}{298K} \right)}$	100	K


Module

Symbol	Conditions	Maximum Ratings	
I_{RMS}	per pin	100	A
T_{VJ}		-40...+150	$^{\circ}\text{C}$
T_{stg}		-40...+125	$^{\circ}\text{C}$
V_{ISOL}	$I_{ISOL} \leq 1\text{ mA}$; 50/60 Hz; $t = 1\text{ min}$	3600	V~
M_d	Mounting torque (M5)	2 - 2.5	Nm

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
d_A, d_S		5		mm
Weight			35	g

Equivalent Circuits for Simulation

Conduction



D1 - D6



Diode (typ. at $T_J = 125^{\circ}\text{C}$)
 $V_0 = 0.85\text{ V}$; $R_0 = 7\text{ m}\Omega$

T/D

IGBT (typ. at $V_{GE} = 15\text{ V}$; $T_J = 125^{\circ}\text{C}$)
 $V_0 = 1.0\text{ V}$; $R_0 = 45\text{ m}\Omega$

Free Wheeling Diode (typ. at $T_J = 125^{\circ}\text{C}$)
 $V_0 = 1.25\text{ V}$; $R_0 = 32\text{ m}\Omega$

Dimensions in mm (1 mm = 0.0394")

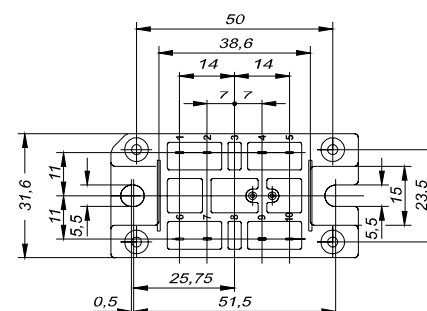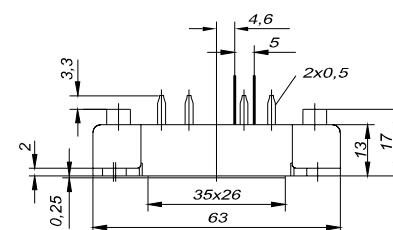

Input Rectifier D1-D6

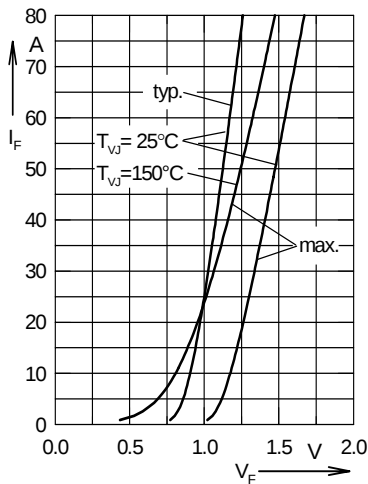


Fig. 1 Forward current versus voltage drop per rectifier diode

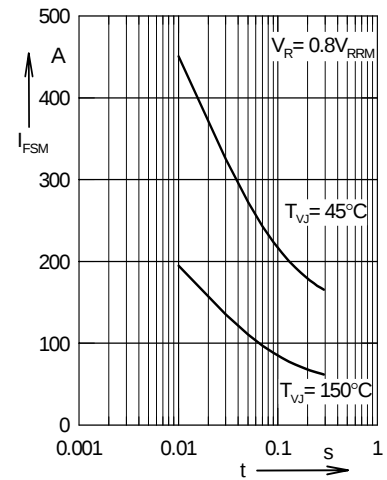


Fig. 2 Surge overload current per rectifier diode

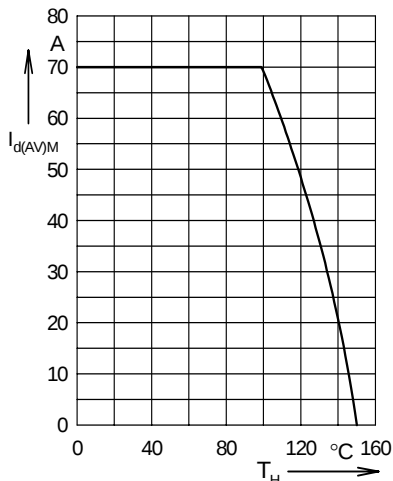


Fig. 3 Maximum forward current versus heatsink temperature (Rectifier bridge)

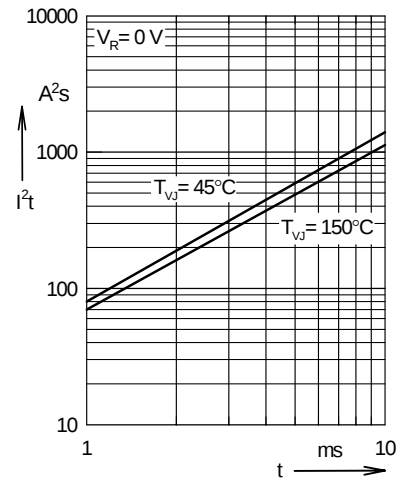


Fig. 4 I^2t versus time per rectifier diode

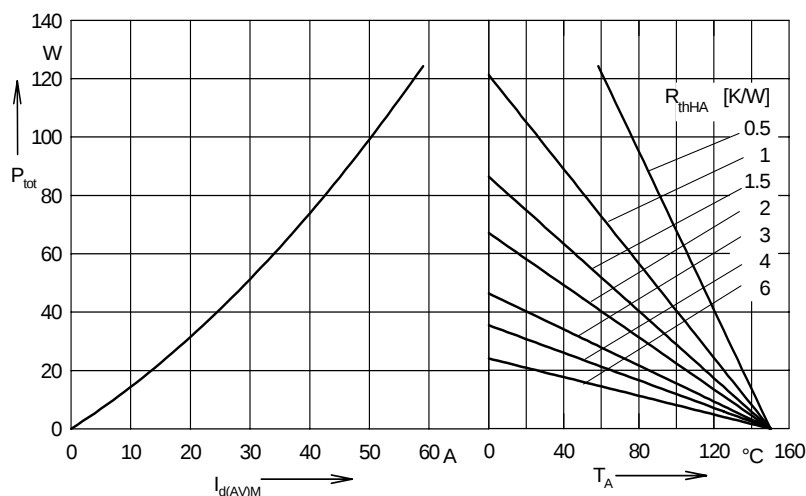


Fig. 5 Power dissipation versus direct output current and ambient temperature (Rectifier bridge)

Note:
transient thermal impedance
see next page

Chopper T - D

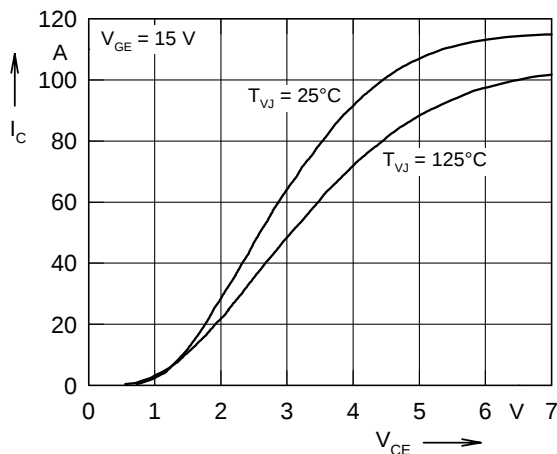


Fig. 6 Typ. IGBT output characteristics

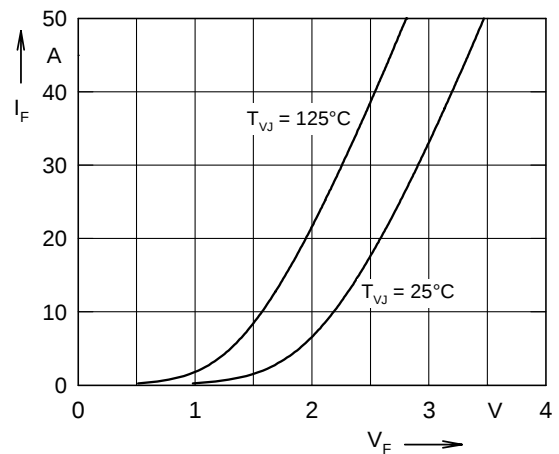


Fig. 7 Typ. forward characteristics of free wheeling diode

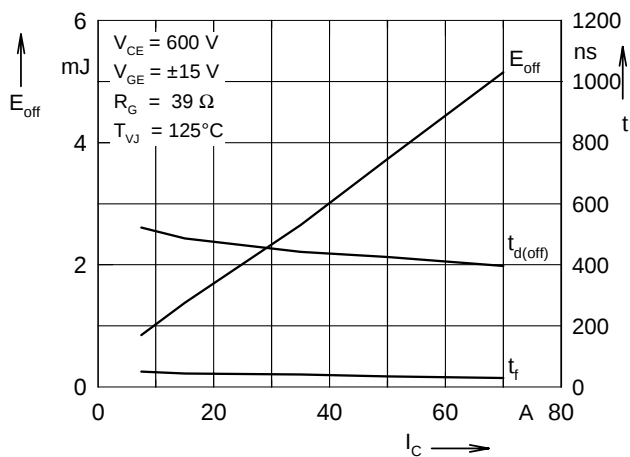


Fig. 8 Typ. IGBT turn off energy and switching times versus collector current

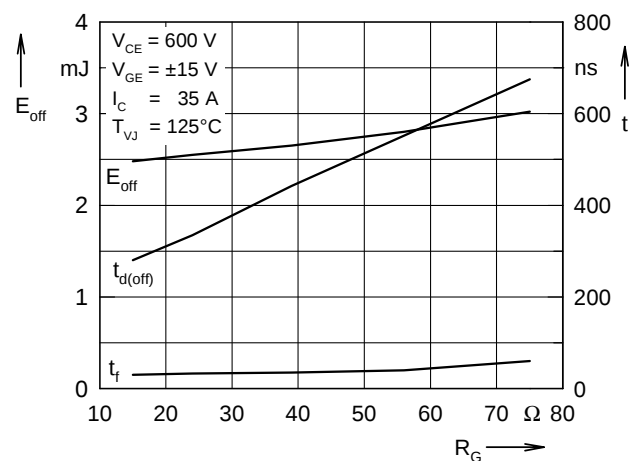


Fig. 9 Typ. IGBT turn off energy and switching times versus gate resistor

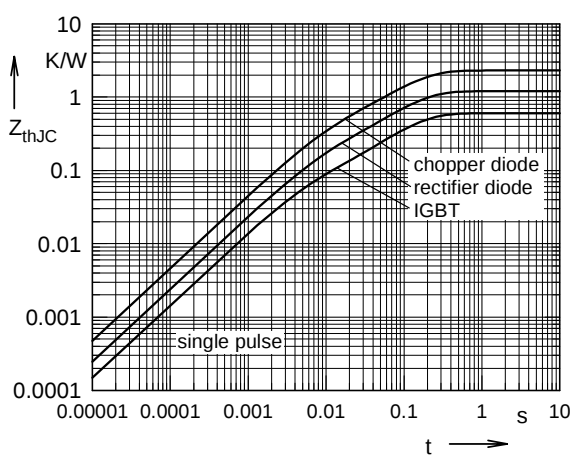


Fig. 10 Typ. transient thermal impedance

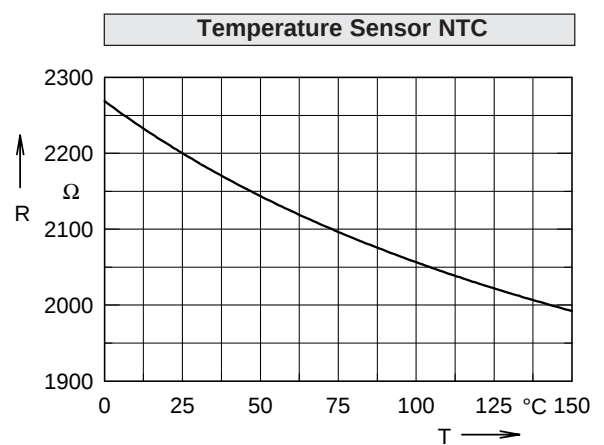


Fig. 11 Typ. thermistorresistance versus temperature

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[VUB72-12NO1](#) [VUB72-16NO1](#)