

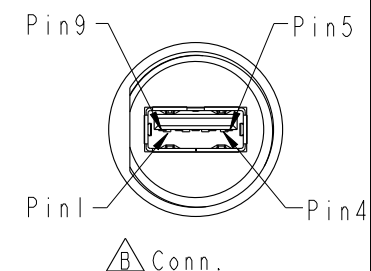


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1760396-398	2017-07-07	Ouyang	Update Pin Out & Update cable
C	C200083	2020/01/13	JC Chen	$\triangle C$ X1
D	C211612	2021/10/25	San	$\triangle D$ X2

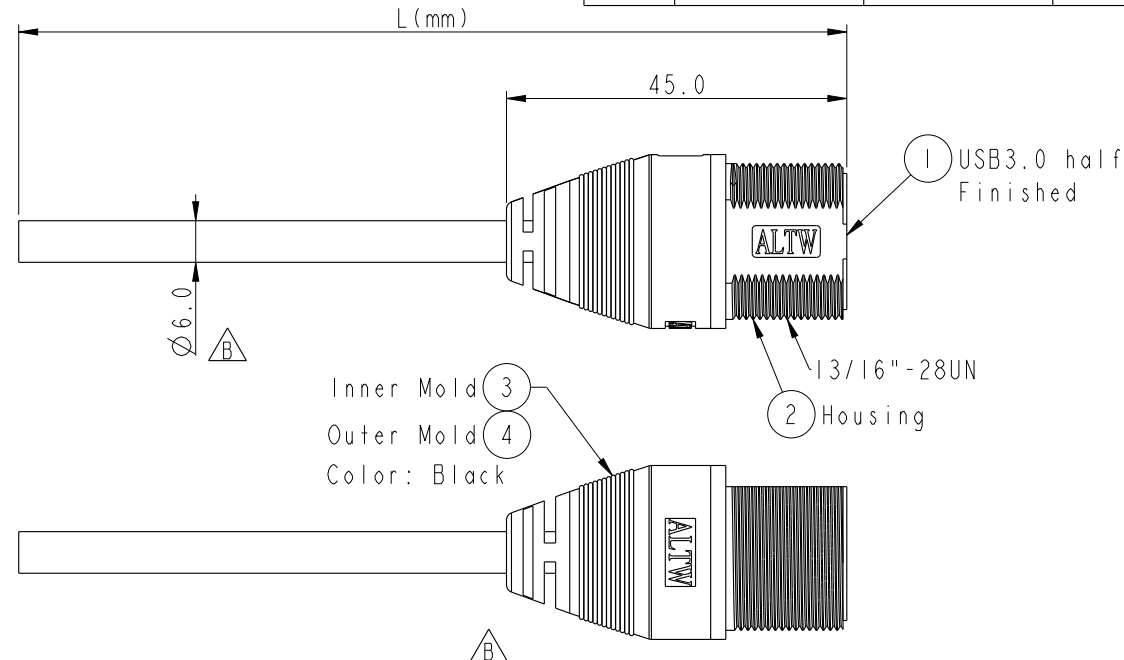

UA-30AMFM-SL7BXX
XX :01~03Meters
01 :01Meter
03 :03Meters
Cable Length(L):01~03Meters

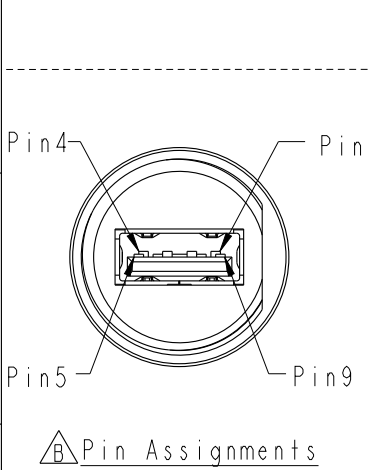

Shield	Braid	編織	Shield	
9	Orange	28AWG 橙	SDP2+	Twist
8	Purple	28AWG 紫	SDP2-	
7	Drain	28AWG	SDP2_Drain	Twist
6	Yellow	28AWG 黃	SDP1+	
5	Blue	28AWG 藍	SDP1-	Twist
7	Drain	28AWG	SDP1_Drain	
4	Black	28AWG 黑	GND_PWRrt	Twist
3	Green	28AWG 綠	UTP_D+	
2	White	28AWG 白	UTP_D-	Twist
1	Red	28AWG 紅	PWR	
Conn.	Wire Color	Signal Name		

Note:
* ϕ Important Dimension.
* Waterproof Rate: IP67
* Jack: USB3.0-A Female Solder
 $\triangle C$ * Housing: Thermoplastic, Black
 $\triangle B$ * Cable: UL2725(IPx28#+DAM)*2+1P*28#+2C*28#+ABD, PVC Jacket, UV Resistant, OD=6.0mm, Black
 $\triangle D$ * Cable Length Tolerance: $\leq 0.3M +25/-0$
 $> 0.3M \sim 1.5M +50/-0$
 $> 1.5M \sim 3M +100/-0$
 $> 3M \sim 5M +150/-0$
* All of Drain twisted together.

UNIT:mm		TITLE USB, A TYPE, 3.0, CABLE W/SR M, F, MOLDING, SCREW $\triangle D$
TOLERANCE .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLES $\pm 1^\circ$	SCALE 1:2	SIZE A4
	REV. D	SHEET 1 OF 1
	WC-REV. A.6	QC: Inspection item

Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY Ouyang	DATE 2017-07-07
		DWG NO UA-30AMFM-SL7BXX	CHECKED BY Feng-li	DATE 2017-07-07
		CUSTOMER ALTW	APPROVED BY Jerry	DATE 2017-07-07