

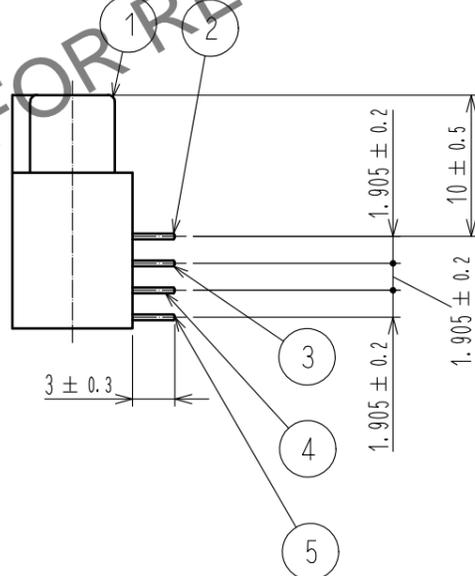
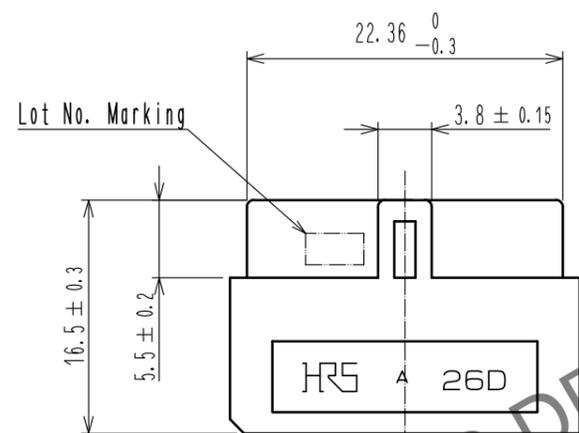
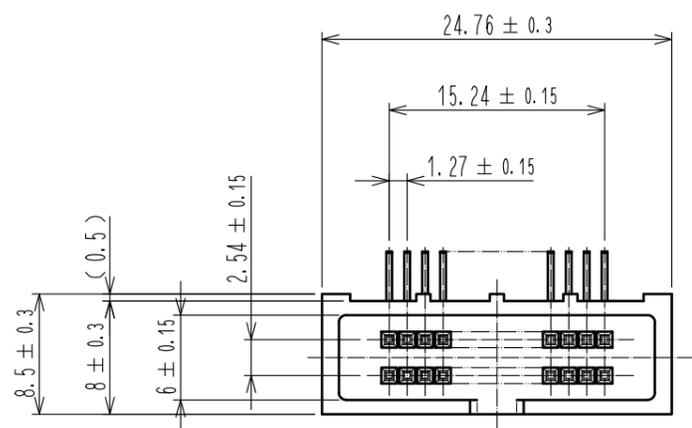


Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

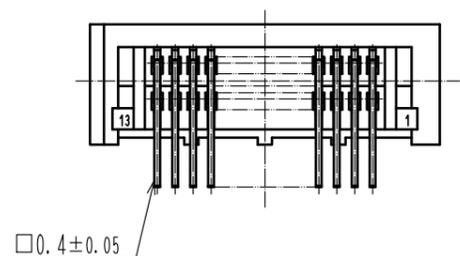

Recommended PC board hole pattern (mounting side)

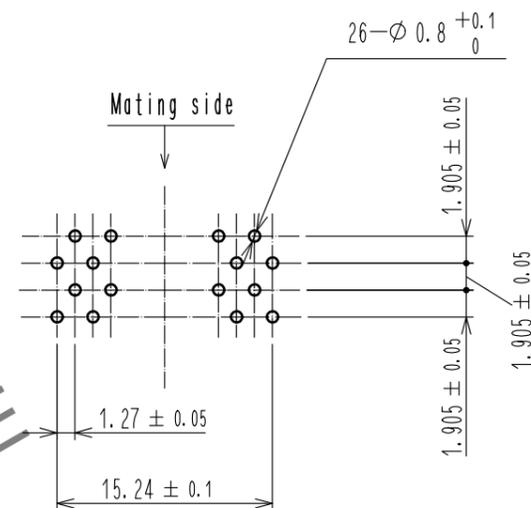

HRS DRAWING FOR REFERENCE

Notes 1 The dimensions in parentheses are for reference.

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
3	PHOSPHOR BRONZE		Contact area : Gold 0.2μm min. Dip area : TIN-Plating 2μm min. Under plating : Nickel 2.5μm min.	5	PHOSPHOR BRONZE		Contact area : Gold 0.2μm min. Dip area : TIN-Plating 2μm min. Under plating : Nickel 2.5μm min.
2	PHOSPHOR BRONZE		Contact area : Gold 0.2μm min. Dip area : TIN-Plating 2μm min. Under plating : Nickel 2.5μm min.	4	PHOSPHOR BRONZE		Contact area : Gold 0.2μm min. Dip area : TIN-Plating 2μm min. Under plating : Nickel 2.5μm min.
1	PBT	BLACK	UL94V-0				

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
HIROSE ELECTRIC CO., LTD.			APPROVED : HT. YAMAGUCHI 18.06.25 CHECKED : HT. YAMAGUCHI 18.06.25 DESIGNED : TY. EDAGAWA 18.06.25 DRAWN : MK. OOKI 18.06.21	DRAWING NO. EDC-019015-71-21 PART NO. HIF6A-26DA-1.27DS(71) CODE NO. CL631-0002-3-71		