

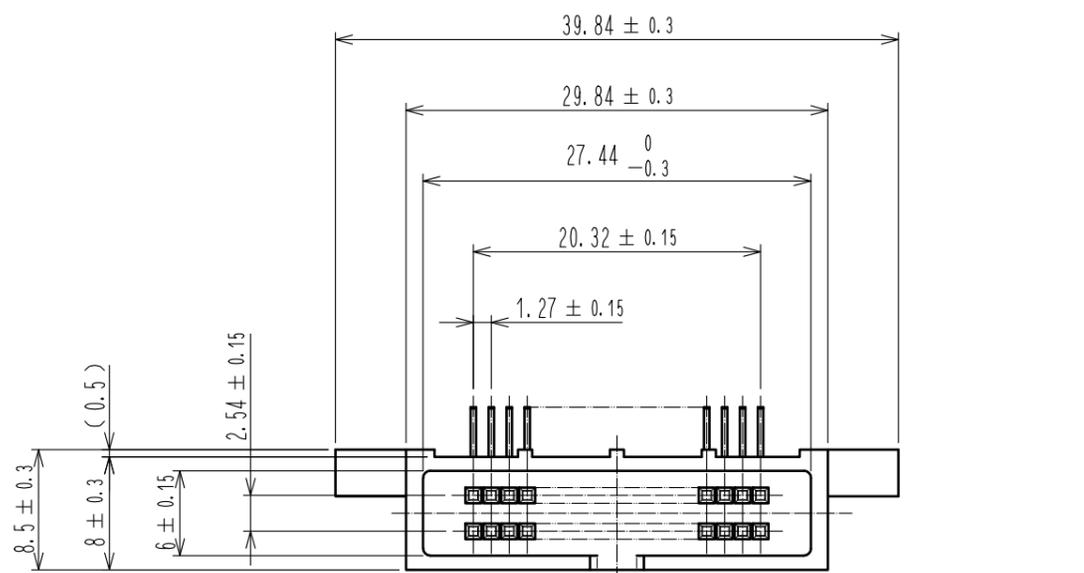
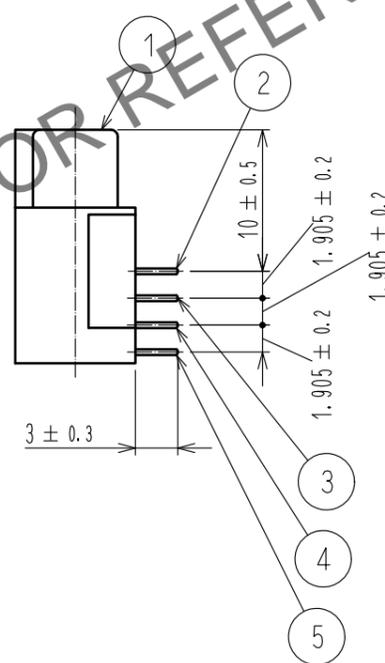



Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

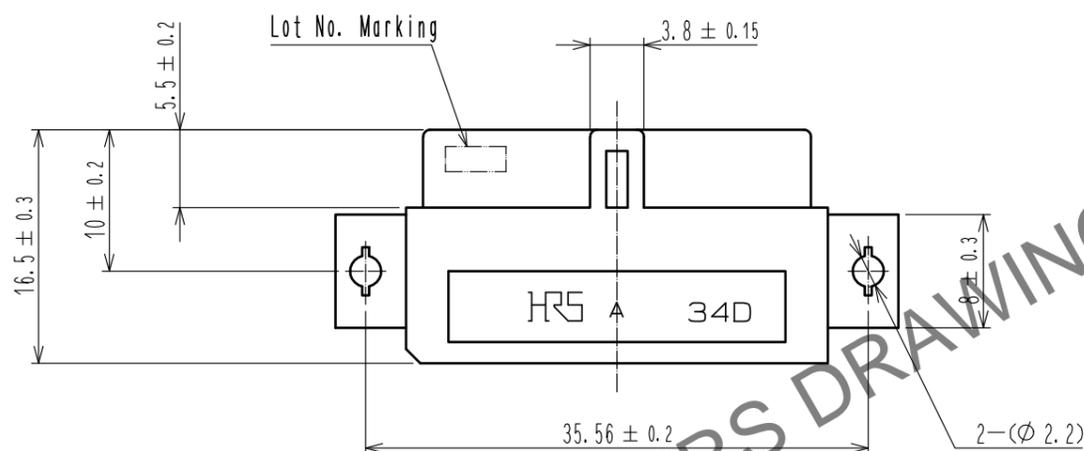

Recommended PC board hole pattern (mounting side)

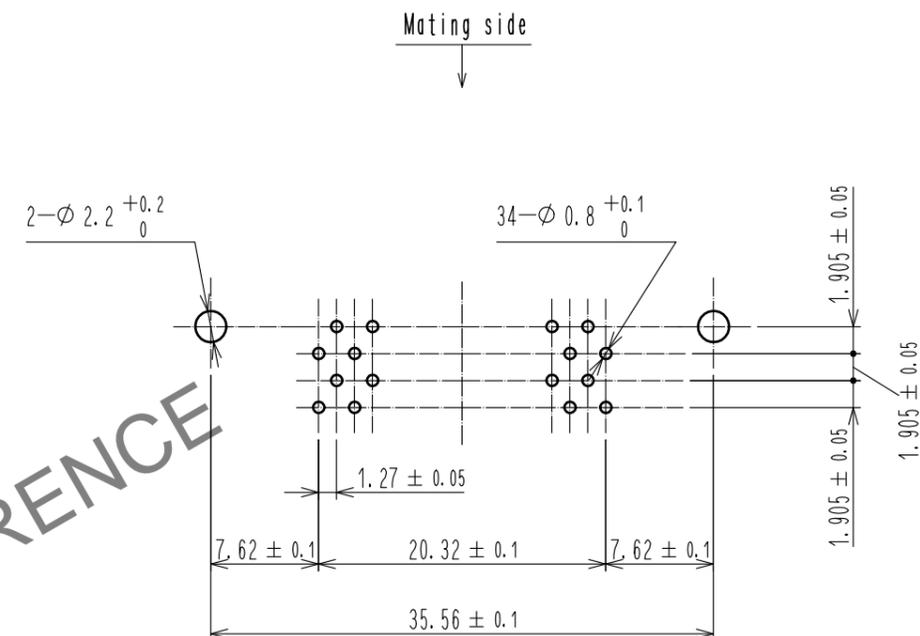

Notes 1 The dimensions in parentheses are for reference.

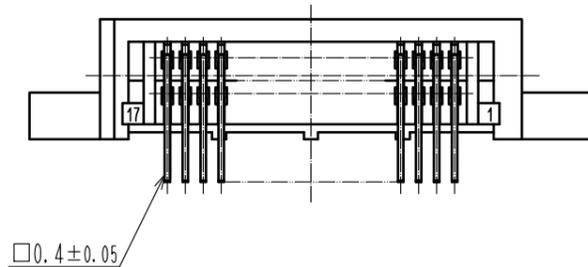

NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS
3	PHOSPHOR BRONZE	Contact area : Gold 0.2μm min Dip area : TIN-Plating 2μm min Under plating : Nickel 2.5μm min		5	PHOSPHOR BRONZE	Contact area : Gold 0.2μm min Dip area : TIN-Plating 2μm min Under plating : Nickel 2.5μm min	
2	PHOSPHOR BRONZE	Contact area : Gold 0.2μm min Dip area : TIN-Plating 2μm min Under plating : Nickel 2.5μm min		4	PHOSPHOR BRONZE	Contact area : Gold 0.2μm min Dip area : TIN-Plating 2μm min Under plating : Nickel 2.5μm min	
1	PBT	BLACK	UL94V-0				

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	△				
APPROVED : HT. YAMAGUCHI			18.06.25	DRAWING NO. EDC-019026-71-21		
CHECKED : HT. YAMAGUCHI			18.06.25	PART NO. HIF6B-34DA-1.27DS(71)		
DESIGNED : TY. EDAGAWA			18.06.25	CODE NO. CL631-0054-7-71		
DRAWN : MK. OOKI			18.06.21	1/1		