


Feb. 1. 2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

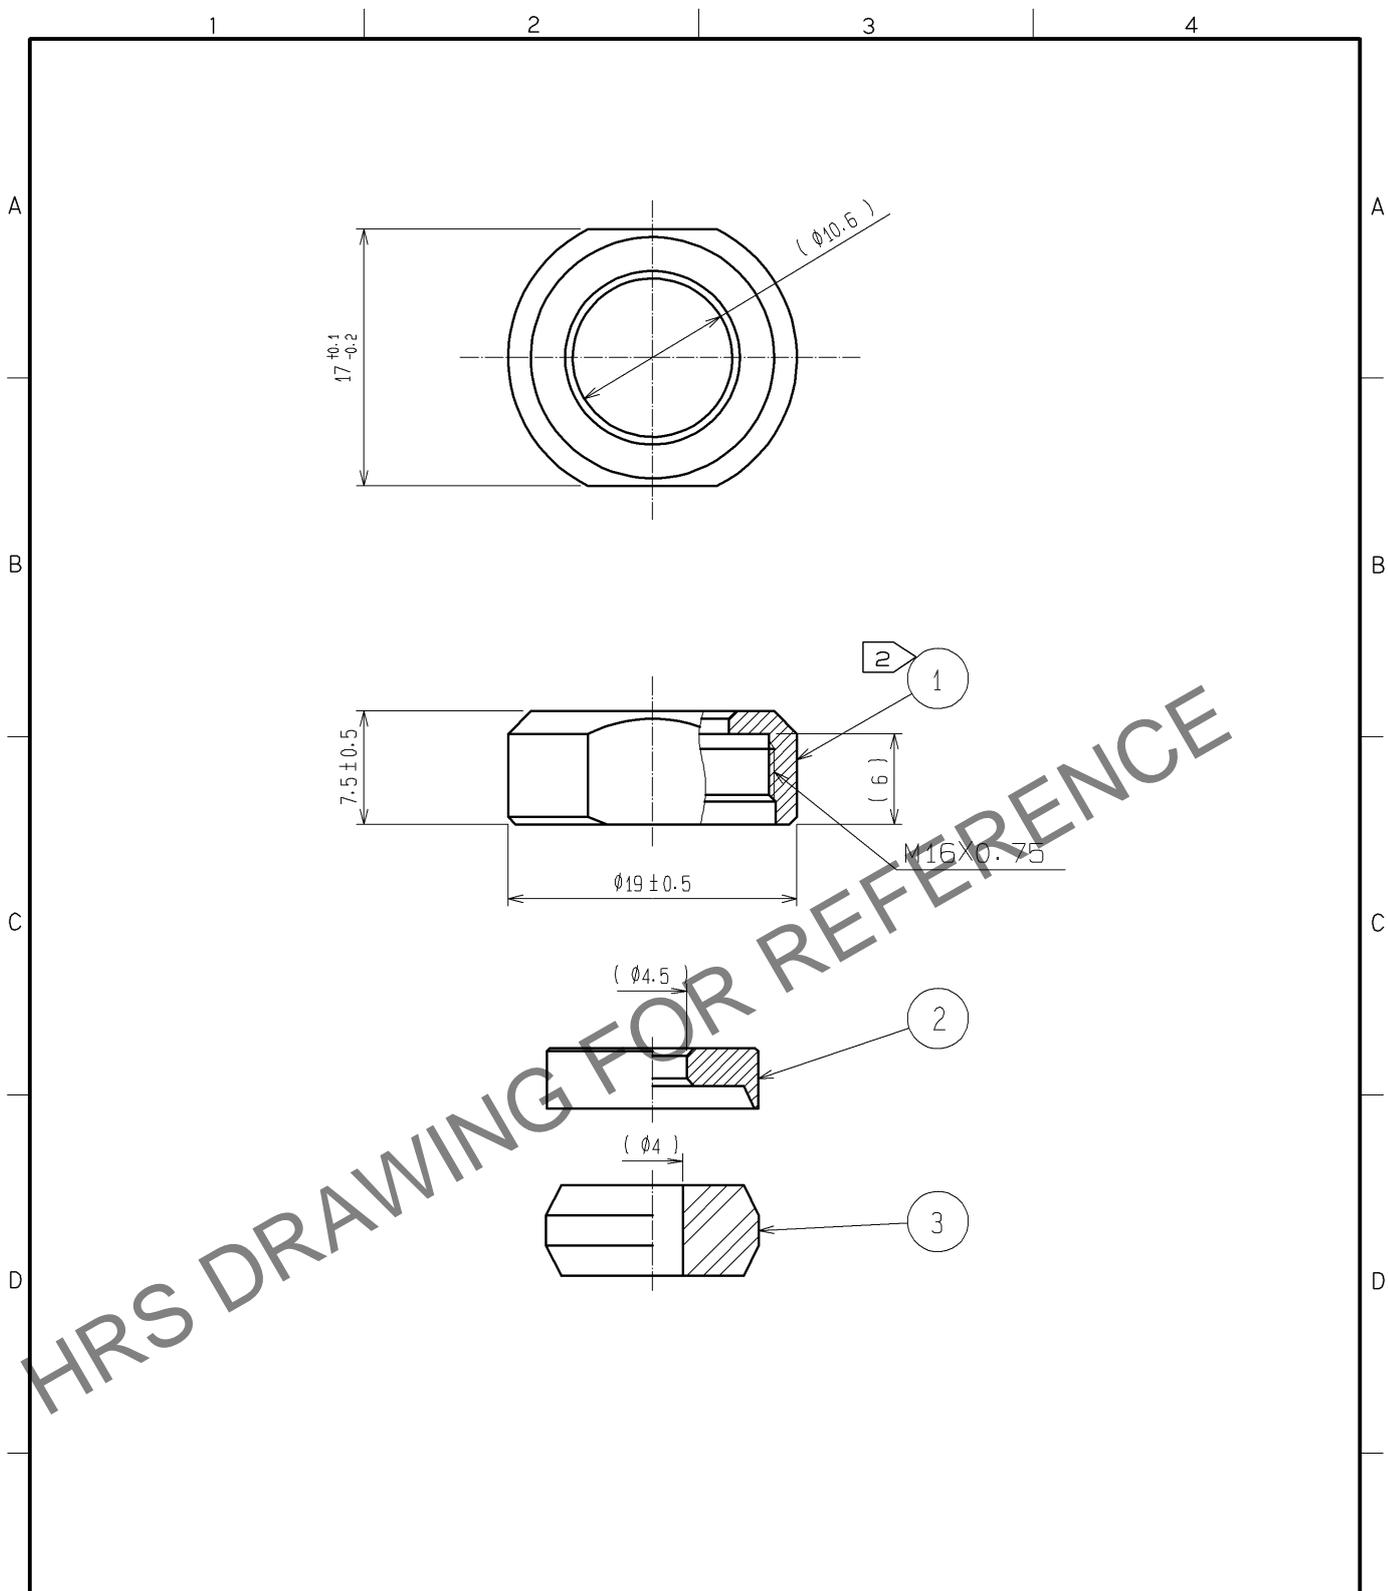

NOTES 1 THIS PRODUCT IS DELIVERED DISASSEMBLED.  
 2 THE RECOMMENDED CLAMP TORQUE OF REF. NO. ① TO BE 2 TO 2.5N · m  
 LOCTITE 271, HENKEL JAPAN OR EQUIVALENT IS RECOMMENDED TO PREVENT  
 REF. NO. ① FROM LOOSENING.

2	BRASS	NICKEL PLATING						
1	BRASS	CHROME PLATING	3	SILICONE RUBBER (BLACK)				
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH	REMARKS	
UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS		DESIGNED	CHECKED	DATE
<b>HRS</b> HIROSE ELECTRIC CO., LTD.	APPROVED	: HY. KISHI	11. 03. 09	DRAWING NO.		EDC4-110618-72		
	CHECKED	: HY. KISHI	11. 03. 09	PART NO.		JR13WCCA-4(72)		
	DESIGNED	: WR. AJIRO	11. 03. 09	CODE NO.		CL114-2069-9-72		
	DRAWN	: WR. AJIRO	11. 03. 09					