


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

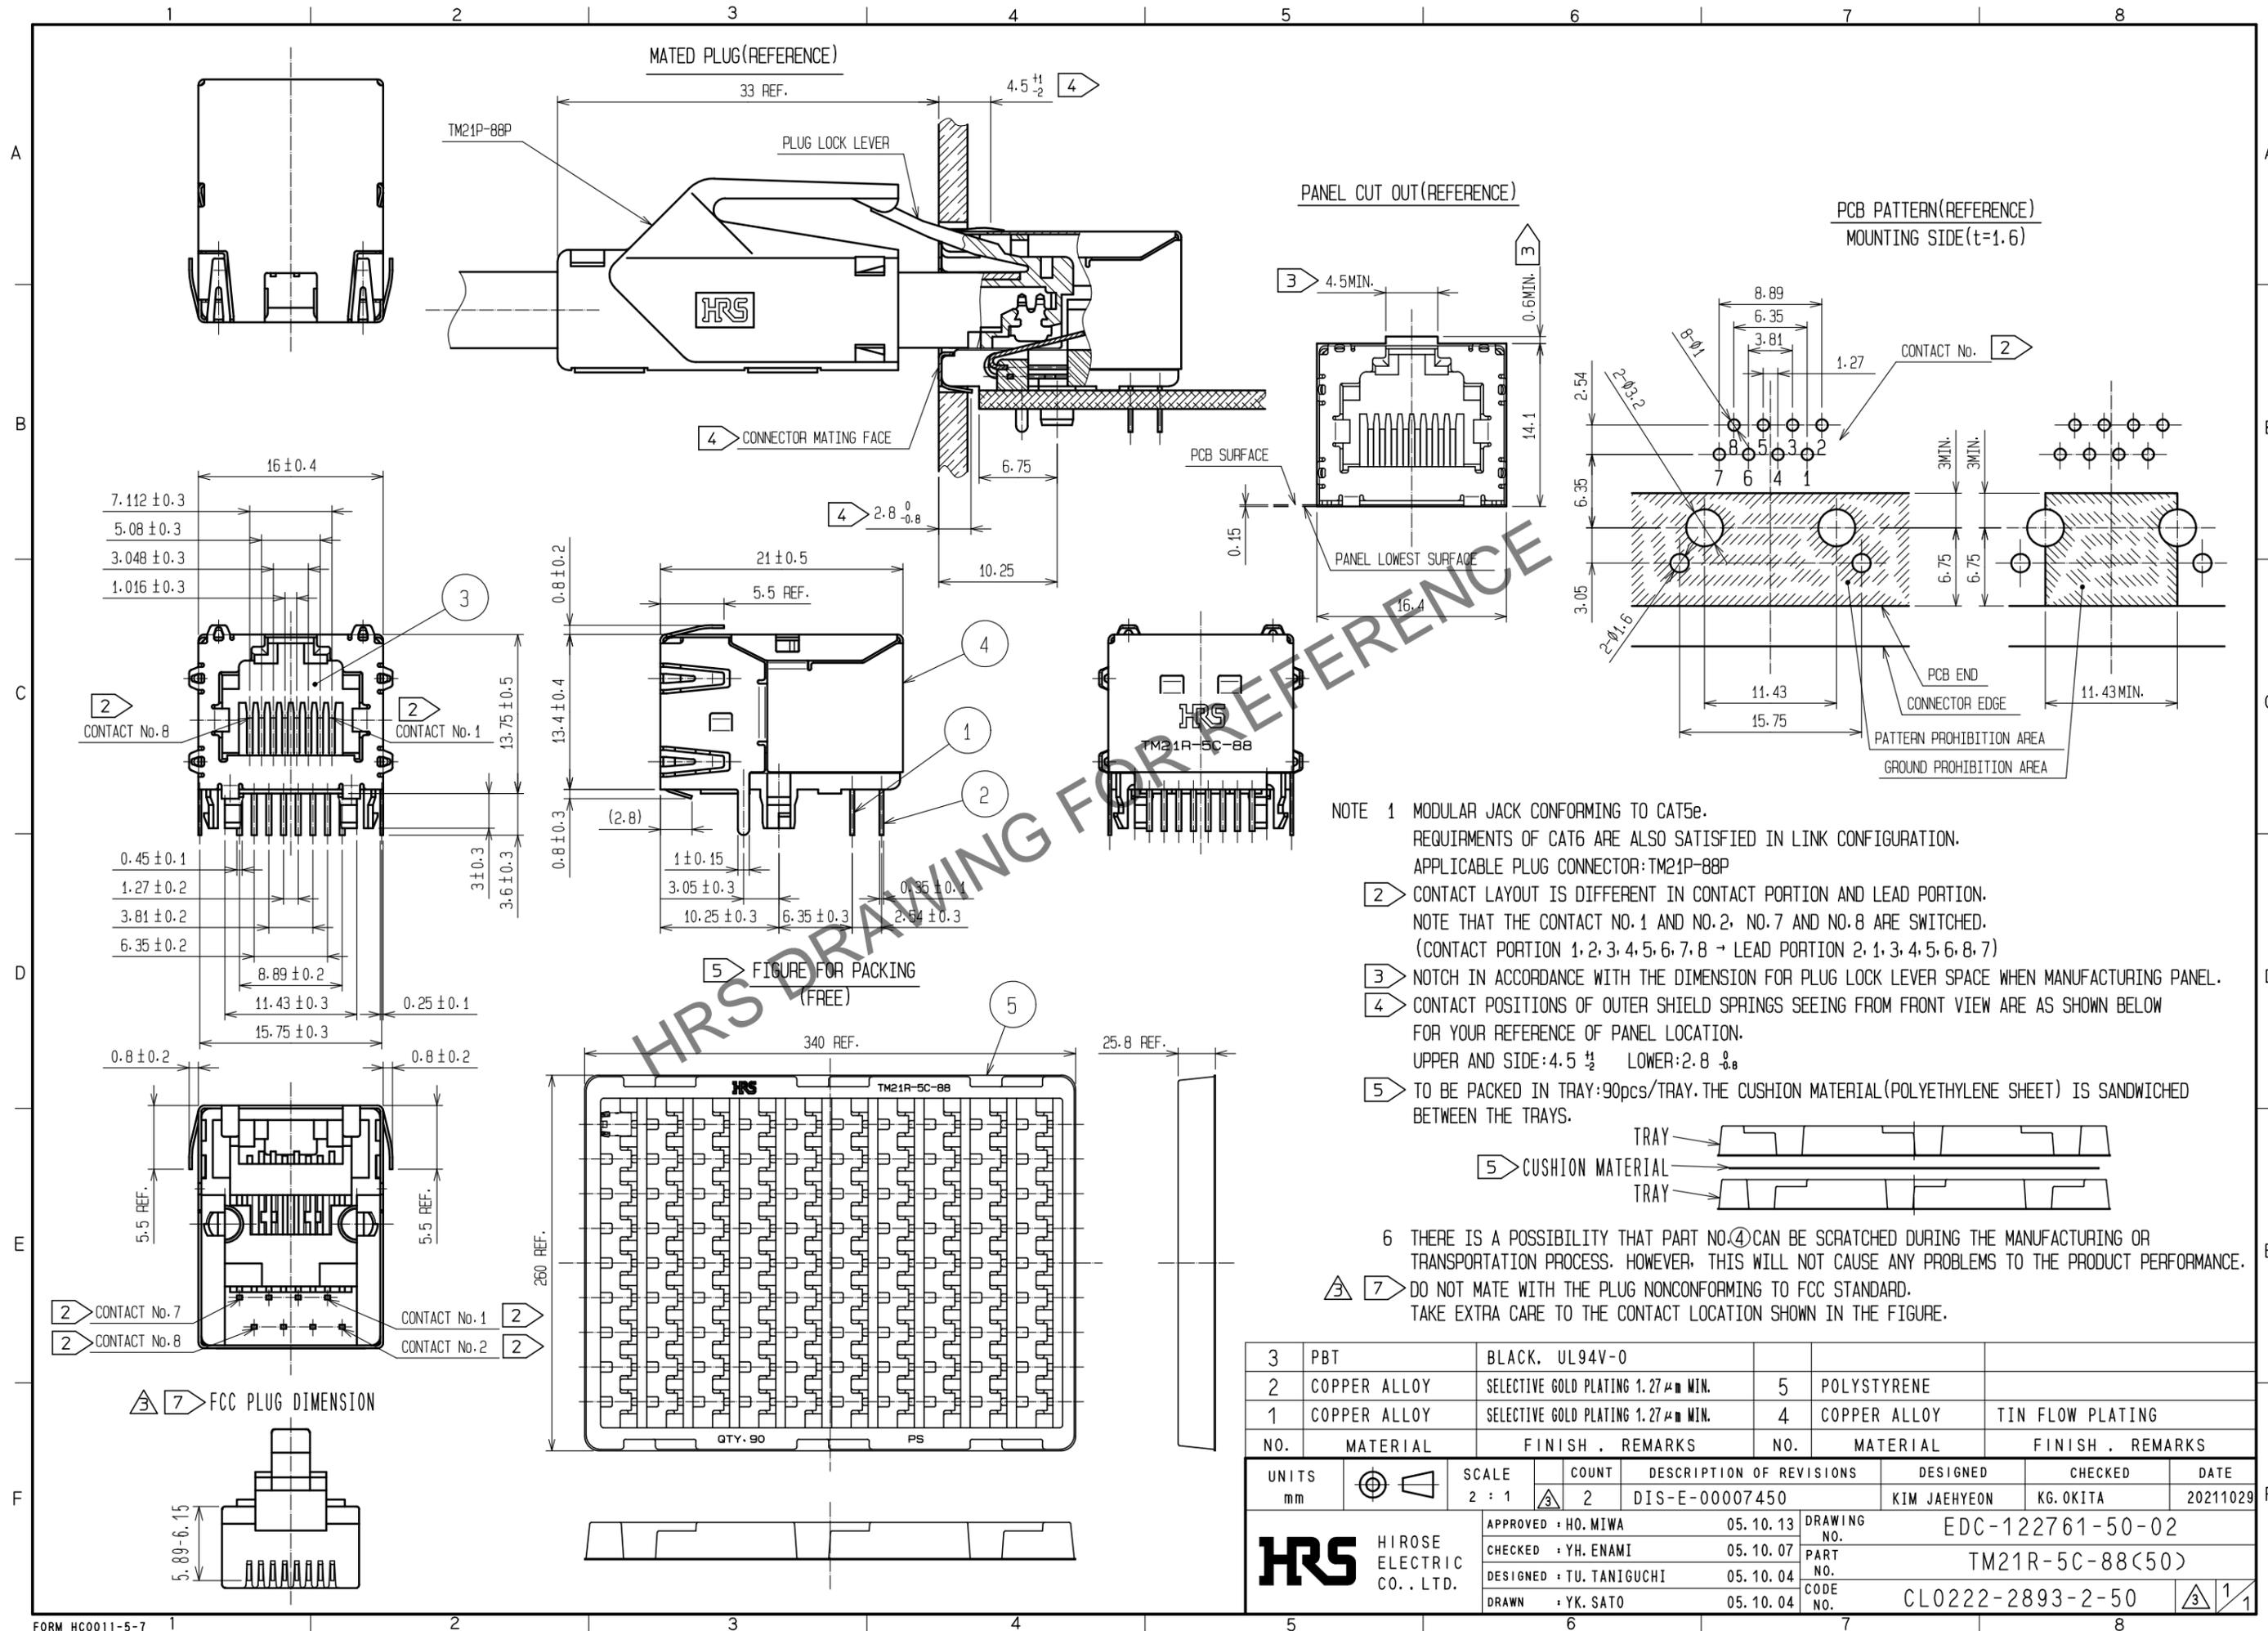

- NOTE 1 MODULAR JACK CONFORMING TO CAT5e.  
 REQUIREMENTS OF CAT6 ARE ALSO SATISFIED IN LINK CONFIGURATION.  
 APPLICABLE PLUG CONNECTOR:TM21P-88P
- 2 CONTACT LAYOUT IS DIFFERENT IN CONTACT PORTION AND LEAD PORTION.  
 NOTE THAT THE CONTACT NO.1 AND NO.2, NO.7 AND NO.8 ARE SWITCHED.  
 (CONTACT PORTION 1,2,3,4,5,6,7,8 → LEAD PORTION 2,1,3,4,5,6,8,7)
- 3 NOTCH IN ACCORDANCE WITH THE DIMENSION FOR PLUG LOCK LEVER SPACE WHEN MANUFACTURING PANEL.
- 4 CONTACT POSITIONS OF OUTER SHIELD SPRINGS SEEING FROM FRONT VIEW ARE AS SHOWN BELOW FOR YOUR REFERENCE OF PANEL LOCATION.  
 UPPER AND SIDE:4.5 ±1/2 LOWER:2.8 ±0.8
- 5 TO BE PACKED IN TRAY:90pcs/TRAY.THE CUSHION MATERIAL (POLYETHYLENE SHEET) IS SANDWICHED BETWEEN THE TRAYS.
- 6 THERE IS A POSSIBILITY THAT PART NO.4 CAN BE SCRATCHED DURING THE MANUFACTURING OR TRANSPORTATION PROCESS. HOWEVER, THIS WILL NOT CAUSE ANY PROBLEMS TO THE PRODUCT PERFORMANCE.
- 7 DO NOT MATE WITH THE PLUG NONCONFORMING TO FCC STANDARD.  
 TAKE EXTRA CARE TO THE CONTACT LOCATION SHOWN IN THE FIGURE.

NO.	MATERIAL	FINISH .	REMARKS	NO.	MATERIAL	FINISH .	REMARKS
3	PBT		BLACK. UL94V-0	5	POLYSTYRENE		
2	COPPER ALLOY		SELECTIVE GOLD PLATING 1.27μm MIN.	4	COPPER ALLOY		TIN FLOW PLATING
1	COPPER ALLOY		SELECTIVE GOLD PLATING 1.27μm MIN.				

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2 : 1	2	DIS-E-00007450	KIM JAEHYEON	KG. OKITA	20211029

APPROVED	DATE	DRAWING NO.
HO. MIWA	05.10.13	EDC-122761-50-02
CHECKED	DATE	PART NO.
YH. ENAMI	05.10.07	TM21R-5C-88(50)
DESIGNED	DATE	CODE NO.
TU. TANIGUCHI	05.10.04	CL0222-2893-2-50
DRAWN	DATE	
YK. SATO	05.10.04	